



SHANKAR EXPLOSIVES INDUSTRIES


Address : Azad Chowk, KATNI - 483501 (M.P.)

Works: Village-Deogaon Tehsil-Rithi, District-KATNI (M.P.)

E-mail : sei_katni@yahoo.co.in

Mobile : 9425162638

TECHNICAL DATA SHEET SHANKH BOOST

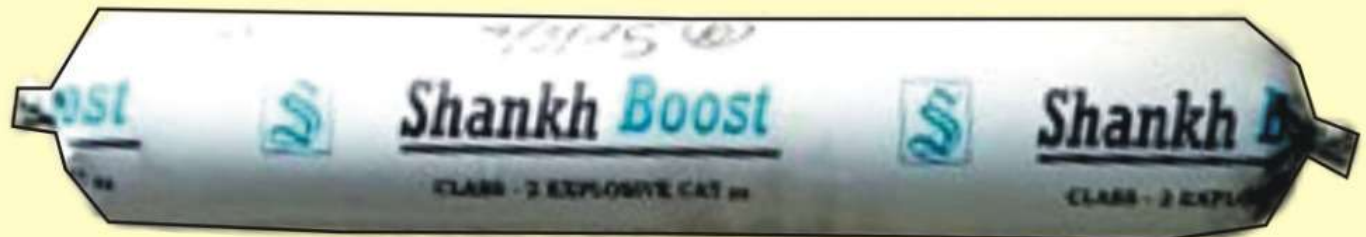

SYSTEM SPECIFICATIONS

EXTRA ALUMINIZED	Shankh Boost has extra Aluminium contents which makes it more powerful. This makes it highly suitable for hard rocks. It eliminates the toe formation.
ADVANTAGE PLUS	Shankh Boost is an effective booster for Non-cap Sensitive Explosives. Its Gel Consistency makes it highly water resistant. Excellent Bore Hole Coupling.
SAFETY	It offers high degree of safety from mechanical impacts and friction. Fume Characteristics-Very Low expulsion of Noxious Fumes.

TECHNICAL SPECIFICATIONS

SN	PARAMETERES	SPECIFICATION
1	Velocity of Detonation M/Sec	4200 to 4500
2	Density gm/cc	1.15 to 1.20
3	Sensitivity	To No. 6 Detonator
4	Water Resistance	Excellent
5	PESO Classification	Class II Explosive

PACKING (25 KG PER CASE)

SN	Diameter (mm)	WEIGHT (kg)	No. OF CARTRIDGES (Nos.)
1	83	2.78	9
2	125	6.25	4
3	200	12.5	2